








专业 ODM OEM 贴牌




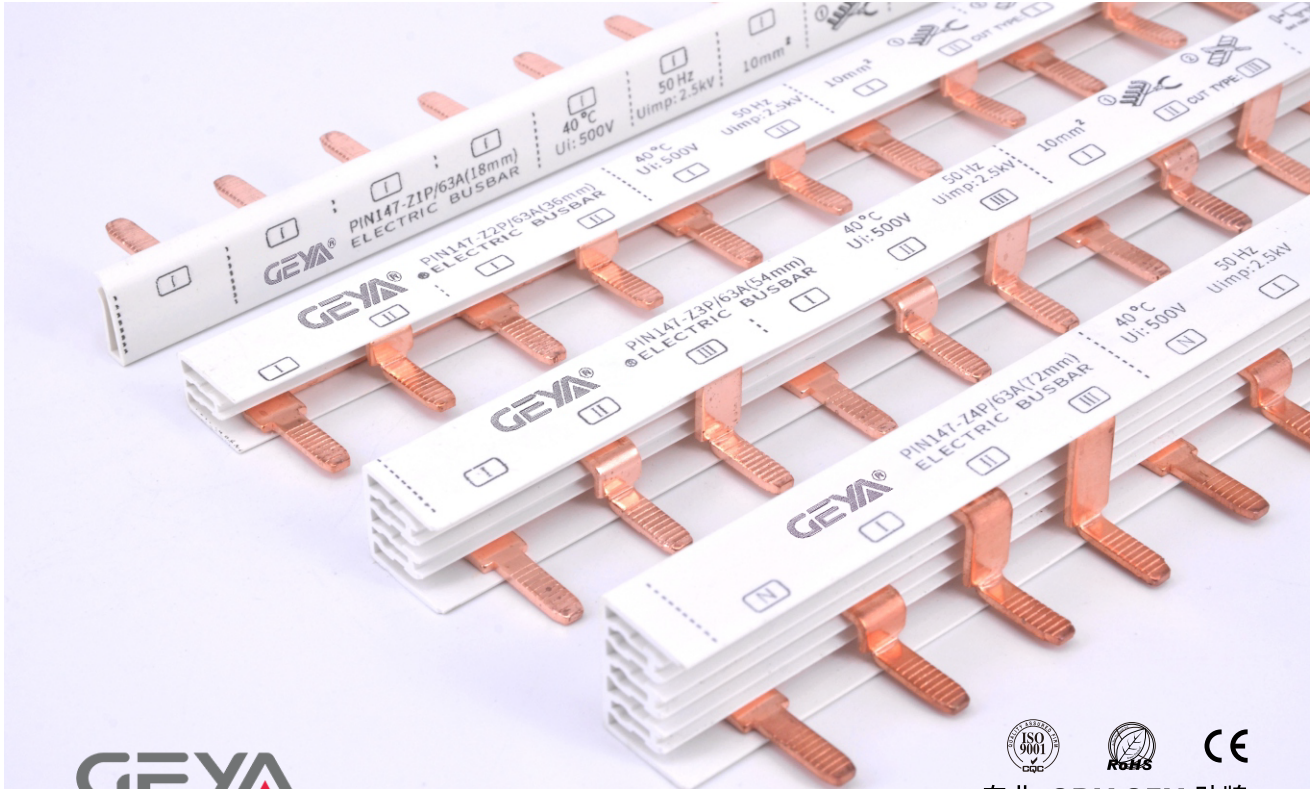




Unit:mm


Specifaication	model	A	B	C	D	E	Cross-Sectional Area	Reference Current
PIN	1P	1.4	7	18	4	12	10mm ²	63A
PIN	1P	1.5	9	18	4	12	13.5mm ²	80A
PIN	1P	1.5	10.5	18	4	12	16mm ²	100A







Unit:mm


Specifaication	model	A	B	C	D	E	Cross-Sectional Area	Reference Current
PIN	2P	1.4	7	18	4	11.5	10mm ²	63A
PIN	2P	1.5	9	18	4	11.5	13.5mm ²	80A
PIN	2P	1.5	10.5	18	4	11.5	16mm ²	100A


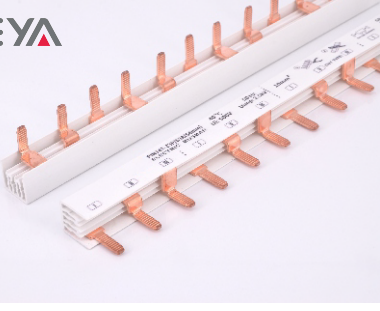


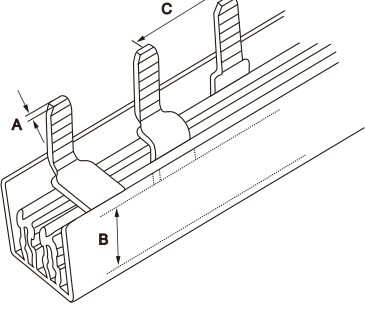

Unit:mm

Specifaication	model	A	B	C	D	E	Cross-Sectional Area	Reference Current
PIN	3P	1.4	7	18	4	11.5	10mm ²	63A
PIN	3P	1.5	9	18	4	11.5	13.5mm ²	80A
PIN	3P	1.5	10.5	18	4	11.5	16mm ²	100A

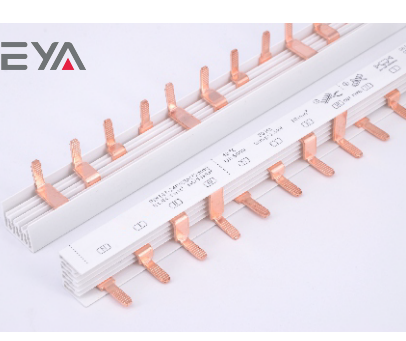


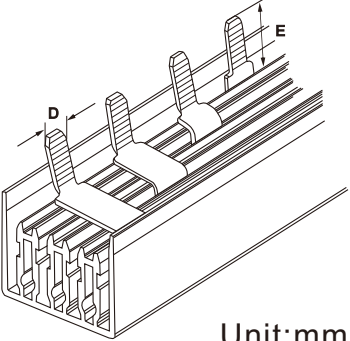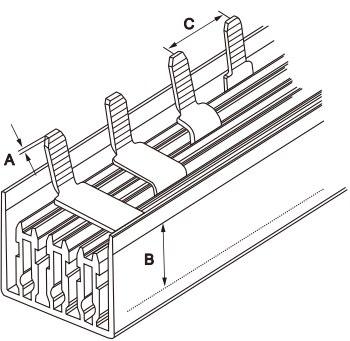

Unit:mm

Specifaication	model	A	B	C	D	E	Cross-Sectional Area	Reference Current
PIN	4P	1.4	7	18	4	11.5	10mm ²	63A
PIN	4P	1.5	9	18	4	11.5	13.5mm ²	80A
PIN	4P	1.5	10.5	18	4	11.5	16mm ²	100A






Unit:mm

Specifaication	model	A	B	C	D	φE	φF	Maximum wiring area	Reference Current
Pin Type Busbar Connector	National standard	45.7	4	3.5	14.8	8	7	Up:25mm ² Right&Left: 35mm ²	100A





Unit:mm

Specifaication	model	A	B	C	Application scope	Materiel
Tooth cap	National standard	22.5	12.6	14	PIN-Type Busbar Fork-Type Busbar	Flame retardant plastics